




起重直臂技術圖冊

STRAIGHT ARM CRANE TECHNICAL ATLAS

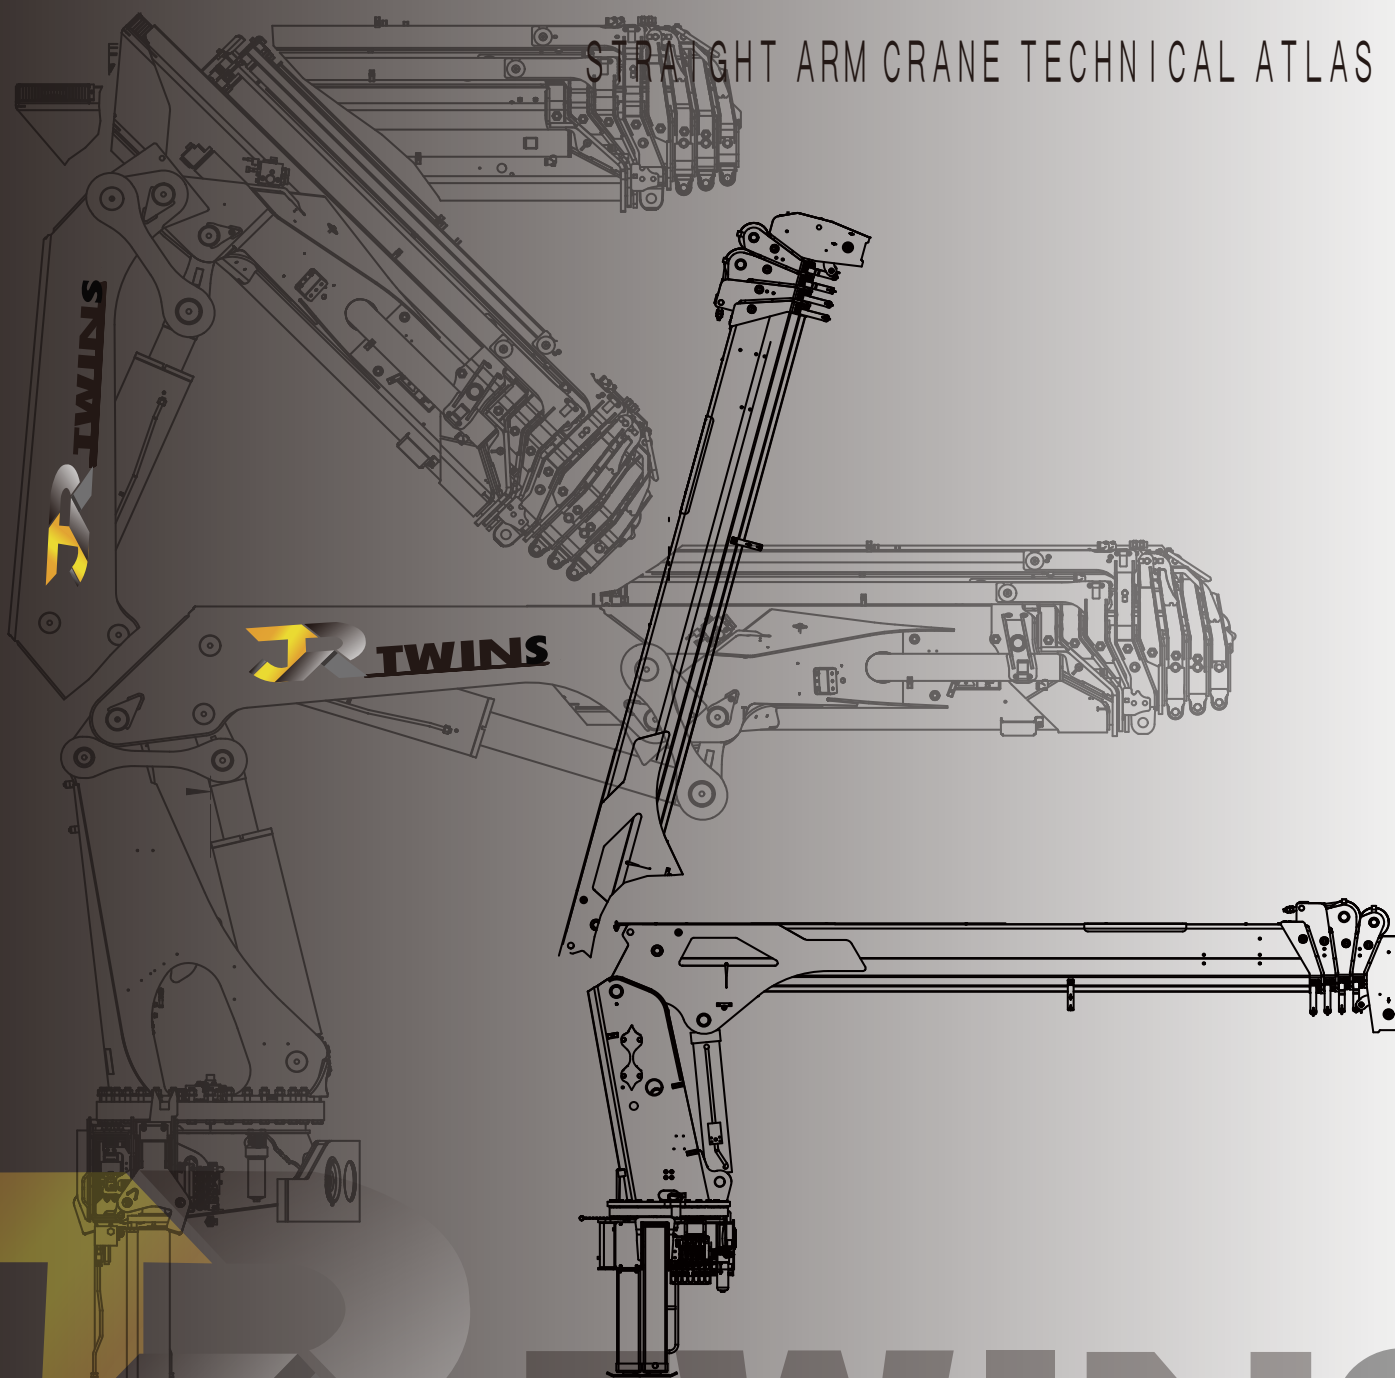

TWINS

Technical specification

Item	Unit	JTN-8000s I
額定吊載重量 Rated lifting weight	Kg	8000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	17.5
最大起升高度 Max lifting height	m	19
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	6
推薦系統流量 Recommend flow of the system	L/min	40
吊機自重 Deadweight of the crane	Kg	4000
系統額定壓力 Rated pressure of the system	Mpa	25


JTN-8000s I 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	5.1	8.1	11.1	14.1	17.5
2.5	*8000				
3.0	*7000	*6500			
3.5	*5000	5500	5300		
4.0	4000	5000	4800	4000	
4.5	3000	4800	4300	3800	2900
5.0		4500	3700	3500	2800
6.0		3600	3200	3000	2500
7.0		2600	2600	2500	2200
8.0			2000	1800	1700
9.0			1600	1500	1400
10			1500	1400	1300
12			1300	1200	1100
14				1000	900
16					800
17.2					600

Recommend magnification

(*) 為6倍率

其餘為4倍率

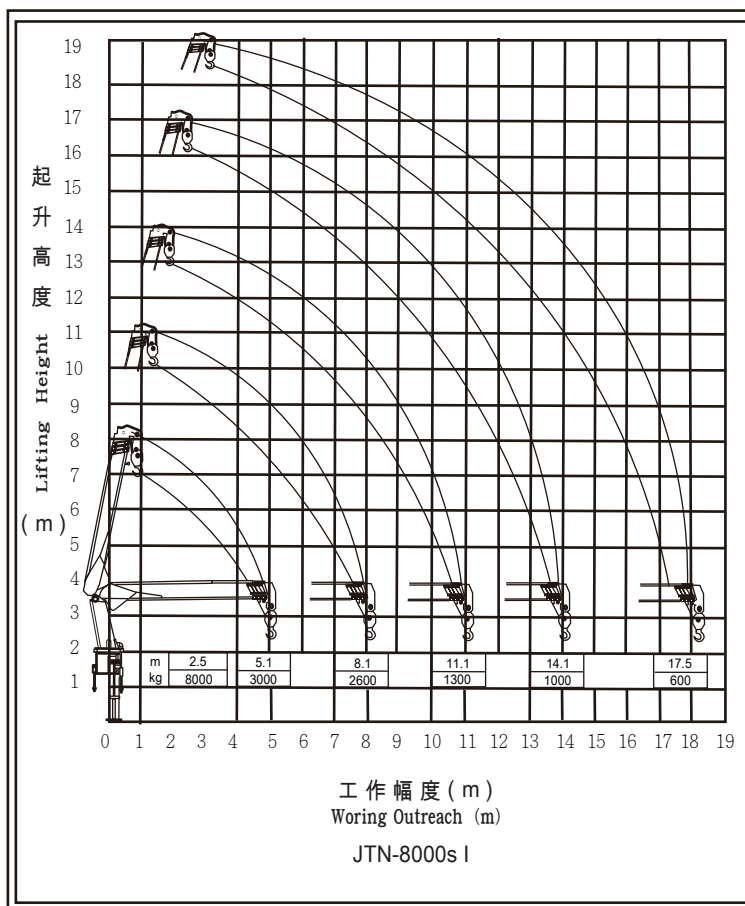

Technical specification

Item	Unit	JTN-8000s II
額定吊載重量 Rated lifting weight	Kg	8000
起重臂節數 Number of the Boom		6
起重臂全伸臂長 Length of fully extended boom	m	19.78
最大起升高度 Max lifting height	m	21
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	6
推薦系統流量 Recommend flow of the system	L/min	96
吊機自重 Deadweight of the crane	Kg	4500
系統額定壓力 Rated pressure of the system	Mpa	22


JTN-8000s II 起重性能參數表

載荷 (KG)	載荷重量 (KG)					
	4.85	7.85	10.84	13.82	16.8	19.78
幅度 (M)						
2.5	*8000	*7000	6000			
3.0	*7000	6000	4500	4000		
3.5	4800	5000	3850	3400	3100	
4.0	4300	4100	3370	3000	2600	2300
4.5	3800	3600	3000	2650	2300	2000
5.0	(4.6) 3200	3000	2700	2400	2100	1800
5.5		2700	2350	2100	1900	1650
6.0		2500	2150	2000	1750	1500
7.0		2100	1850	1700	1500	1300
8.0		(7.6) 1700	1600	1500	1300	1150
9.0			1400	1300	1150	1000
10			(10.6) 1100	1200	1050	900
11				1050	900	810
12				1000	820	750
13				900	750	700
14				(13.55) 700	650	600
15					600	550
16					(18.5) 550	520
17						490
18						450
19						420
19.5						300

Recommend magnification

(*) 為6倍率

其餘為4倍率

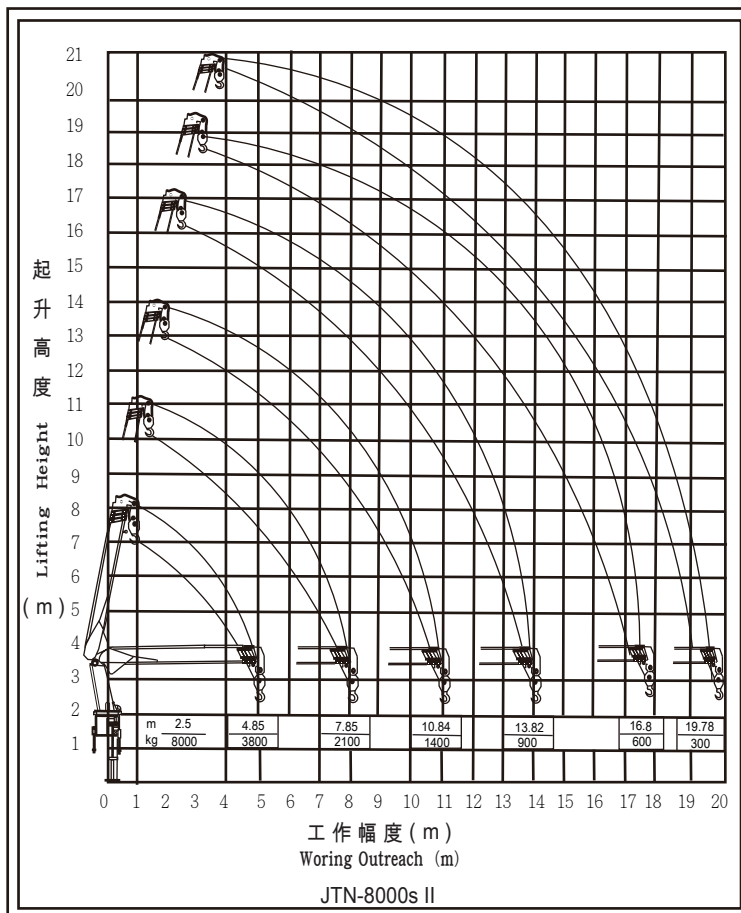


Technical specification

Item	Unit	JTN-10000s I
額定吊載重量 Rated lifting weight	Kg	10000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	17.5
最大起升高度 Max lifting height	m	19
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	6
推薦系統流量 Recommend flow of the system	L/min	50
吊機自重 Deadweight of the crane	Kg	4500
系統額定壓力 Rated pressure of the system	Mpa	25

JTN-10000s I 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	5.3	8.5	11.7	14.9	17.5
2.5	10000	6100			
3.0	8000	5700	5200		
3.5	6700	5200	4800	4000	
4.0	5800	4600	4400	3740	
4.5	5000	4200	3800	3500	3310
5.0		3800	3500	3100	3020
5.5		3360	3020	2860	2780
6.0		3140	2810	2650	2580
6.5		3000	2630	2480	2400
7.0		2800	2470	2330	2250
7.5		2600	2330	2190	2120
8.0		2400	2210	2070	2000
8.5			2090	1970	1900
9.0			1990	1870	1810
9.5			1890	1780	1720
10			1790	1700	1640
10.5			1680	1630	1570
11			1570	1560	1510
11.5				1490	1450
12				1430	1390
12.5				1370	1340
13				1310	1290
13.5				1260	1250
14				1210	1200
14.5				1170	1160
15					1120
15.5					1080
16					1030
16.5					990
17					930
17.2					900
Recommend magnification	6	4	4	4	4

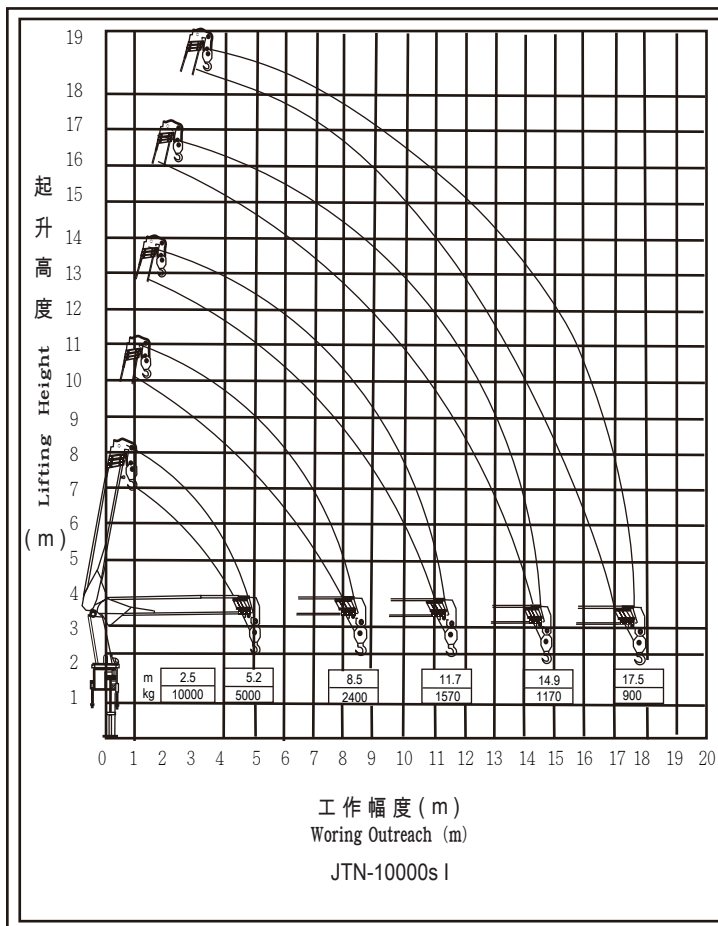


Technical specification

Item		Unit	JTN-10000s II
額定吊載重量	Rated lifting weight	Kg	10000
起重臂節數	Number of the Boom		5
起重臂全伸臂長	Length of fully extended boom	m	18.1
最大起升高度	Max lifting height	m	21
最大支腿跨距 (全伸)	Outrigger span (fully extended)	m	6
推薦系統流量	Recommend flow of the system	L/min	50
吊機自重	Deadweight of the crane	Kg	4500
系統額定壓力	Rated pressure of the system	Mpa	25

JTN-10000s II 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	5.3	8.5	11.7	14.9	18.1
2.5	10000	6100			
3.0	8000	5700	5200		
3.5	6700	5200	4800	4000	
4.0	5800	4600	4400	3740	
4.5	5000	4200	3800	3500	3310
5.0		3800	3500	3100	3020
5.5		3360	3020	2860	2780
6.0		3140	2810	2650	2580
6.5		3000	2630	2480	2400
7.0		2800	2470	2330	2250
7.5		2600	2330	2190	2120
8.0		2400	2210	2070	2000
8.5			2090	1970	1900
9.0			1990	1870	1810
9.5			1890	1780	1720
10			1790	1700	1640
10.5			1680	1630	1570
11			1570	1560	1510
11.5				1490	1450
12				1430	1390
12.5				1370	1340
13				1310	1290
13.5				1260	1250
14				1210	1200
14.5				1170	1160
15					1120
15.5					1080
16					1030
16.5					990
17					930
17.7					900
18.6					700
Recommend magnification	6	4	4	4	4

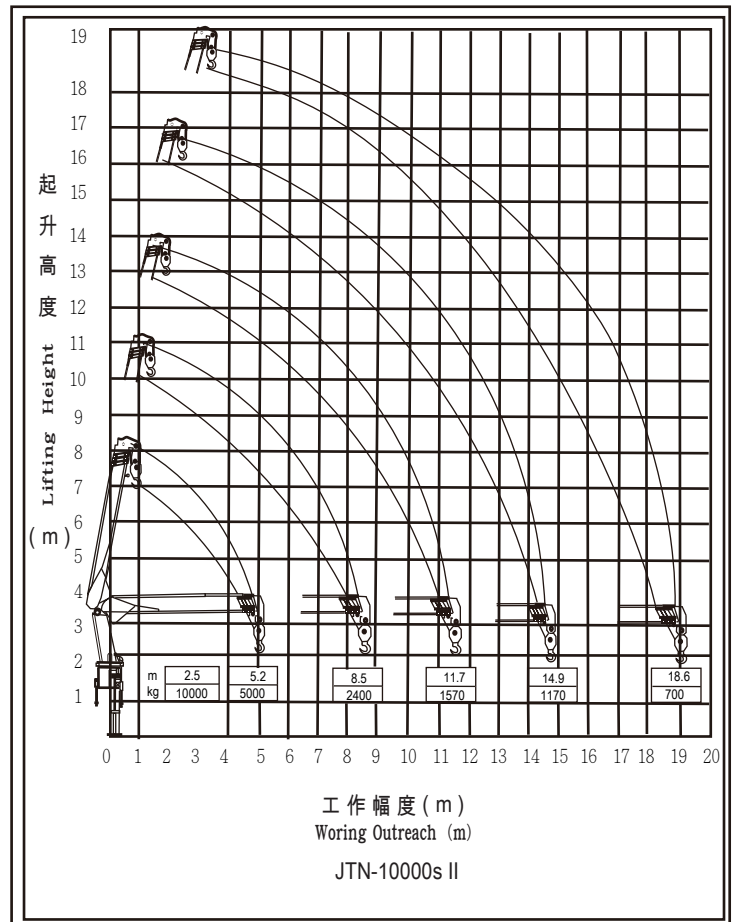

Technical specification

Item	Unit	JTN-14000s I
額定吊載重量 Rated lifting weight	Kg	14000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	17.5
最大起升高度 Max lifting height	m	19
最大支腿跨距 (全伸) Outrigger span (fully extended)	m	7.2
推薦系統流量 Recommend flow of the system	L/min	63
吊機自重 Deadweight of the crane	Kg	5700
系統額定壓力 Rated pressure of the system	Mpa	25


JTN-14000s I 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	5.2	9.0	12.2	15.4	17.5
2.5	*14000				
3.0	*11000	*9000			
3.5	10000	8300	7000		
4.0	8700	8000	6400	6000	
4.5	7700	7400	6000	5400	4400
5.0	7000	6600	5200	5000	3700
6.0	6800	6200	4400	4000	3200
7.0		5500	3500	3200	2900
8.0		4800	3000	3000	2600
9.0		4300	2800	2800	2200
11			2200	2000	1800
13				1700	1500
15				1300	1300
17					1100
17.2					1000

Recommend magnification

(*) 為6倍率

其餘為4倍率

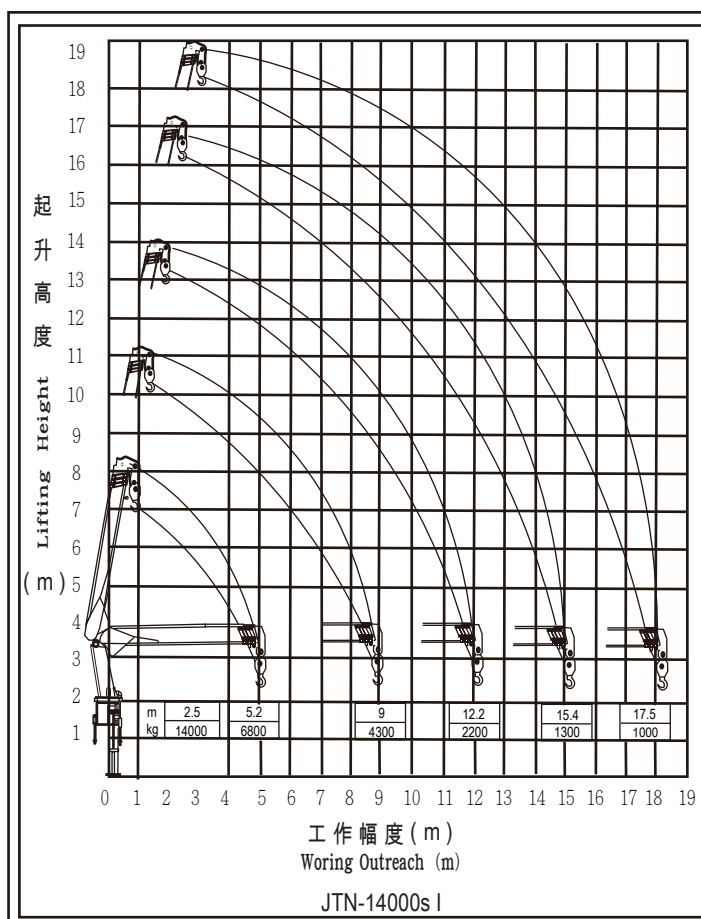


Technical specification

Item	Unit	JTN-14000s II
額定吊載重量 Rated lifting weight	Kg	14000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	19.4
最大起升高度 Max lifting height	m	21.6
最大支腿跨距 (全伸) Outrigger span (fully extended)	m	7.2
推薦系統流量 Recommend flow of the system	L/min	63
吊機自重 Deadweight of the crane	Kg	5950
系統額定壓力 Rated pressure of the system	Mpa	25

JTN-14000s II 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	5.85	9.4	12.85	16.3	19.75
2.0	15000				
2.5	14000	12190			
3.0	12000	10700			
3.5	10700	9480	8320		
4.0	9160	8320	7700		
4.5	7900	7490	6860	5810	
5.0	7280	6760	6240	5200	
5.5		6030	5510	4900	4590
6.0		5410	4990	4490	4280
6.5		4990	4680	4080	3770
7.0		4680	4370	3770	3470
7.5		4320	3820	3060	3160
8.0		4120	3630	2790	2860
8.5		3720	3450	2760	2650
9.0		3550	3200	2550	2450
9.5			3020	2470	2400
10.0			2840	2390	2350
10.5			2660	2290	2240
11.0			2500	2230	2140
11.5			2350	2120	2040
12.0			2160	2010	1890
12.5			2030	1990	1700
13.0				1910	1650
13.5				1840	1630
14.0				1690	1510
14.5				1570	1470
15.0				1520	1420
15.5				1460	1370
16.0					1300
16.5					1200
17.0					1100
17.5					1000
18.0					950
18.5					900
19.0					850
19.4					820
Recommend magnification	6	4	4	4	4

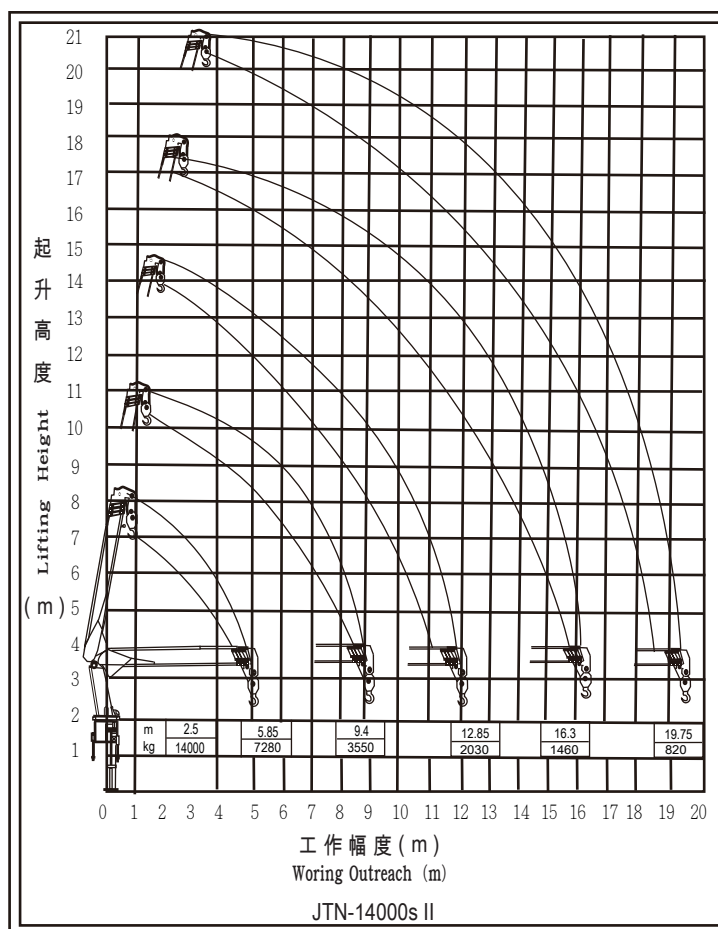


Technical specification

Item	Unit	JTN-18000s I
額定吊載重量 Rated lifting weight	Kg	18000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	17.5
最大起升高度 Max lifting height	m	19
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	7250
推薦系統流量 Recommend flow of the system	L/min	80
吊機自重 Deadweight of the crane	Kg	6400
系統額定壓力 Rated pressure of the system	Mpa	32

JTN-18000s I 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	5.2	9.4	12.6	15.8	17.5
2.5	18000	12700			
3.0	15000	11100			
3.5	13000	9900	9220		
4.0	12000	8970	8290	7970	
4.5	10500	8220	7550	7230	
5.0	9040	7600	6950	6630	6460
5.5	8170	7080	6440	6130	5960
6.0		6630	6010	5710	5540
6.5		6240	5650	5350	5180
7.0		5890	5320	5040	4870
7.5		5560	5040	4760	4600
8.0		5240	4790	4510	4360
8.5		4880	4560	4300	4140
9.0		4350	4340	4100	3950
9.5			4150	3920	3770
10			3960	3760	3620
10.5			3780	3600	3470
11			3600	3460	3340
11.5			3390	3330	3220
12			3190	3180	3100
12.5				3090	2990
13				2970	2900
13.5				2860	2800
14				2740	2710
14.5				2620	2610
15				2540	2530
15.5					2460
16					2380
16.5					2300
17					2220
17.2					2130
Recommend magnification	6	4	4	4	4

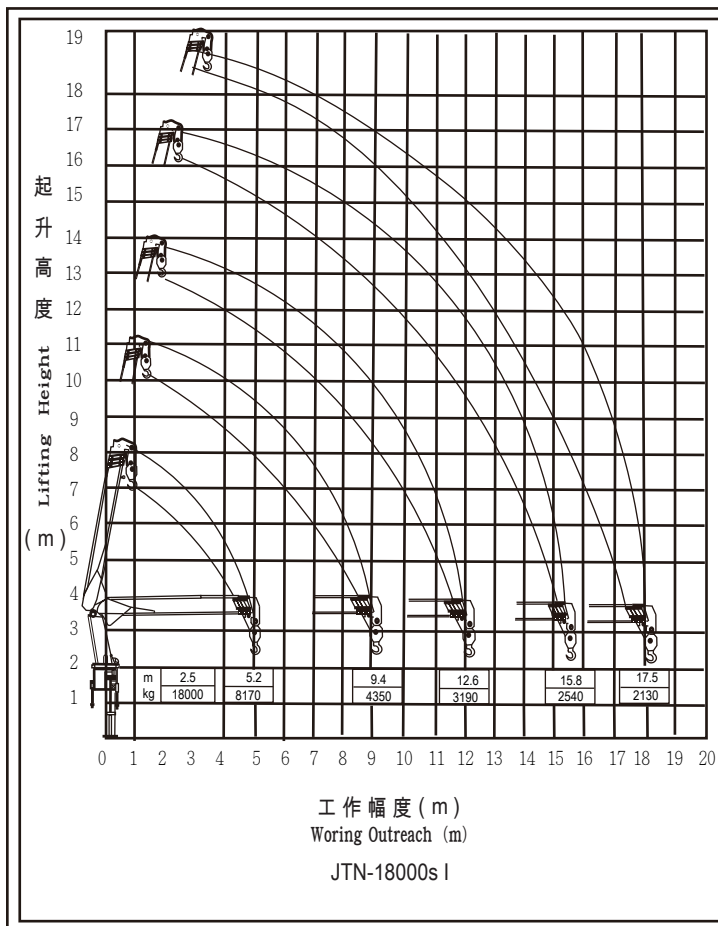


Technical specification

Item	Unit	JTN-18000s II
額定吊載重量 Rated lifting weight	Kg	18000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	19
最大起升高度 Max lifting height	m	20.7
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	7250
推薦系統流量 Recommend flow of the system	L/min	80
吊機自重 Deadweight of the crane	Kg	6100
系統額定壓力 Rated pressure of the system	Mpa	32

JTN-18000s II 起重性能參數表

載荷 (KG)	載荷重量 (KG)				
幅度 (M)	6.1	9.4	12.6	15.8	19
2.5	18000	12700			
3.0	15000	11100			
3.5	13000	9900	9220		
4.0	12000	8970	8290	7970	
4.5	10500	8220	7550	7230	
5.0	9040	7600	6950	6630	6460
5.5	8170	7080	6440	6130	5960
6.0		6630	6010	5710	5540
6.5		6240	5650	5350	5180
7.0		5890	5320	5040	4870
7.5		5560	5040	4760	4600
8.0		5240	4790	4510	4360
8.5		4880	4560	4300	4140
9.0		4350	4340	4100	3950
9.5			4150	3920	3770
10			3960	3760	3620
10.5			3780	3600	3470
11			3600	3460	3340
11.5			3390	3330	3220
12			3190	3180	3100
12.5				3090	2990
13				2970	2900
13.5				2860	2800
14				2740	2710
14.5				2620	2610
15				2540	2530
15.5					2460
16					2380
16.5					2300
17					2220
17.5					2130
18					2020
18.5					1910
18.6					1680
Recommend magnification	6	4	4	4	4

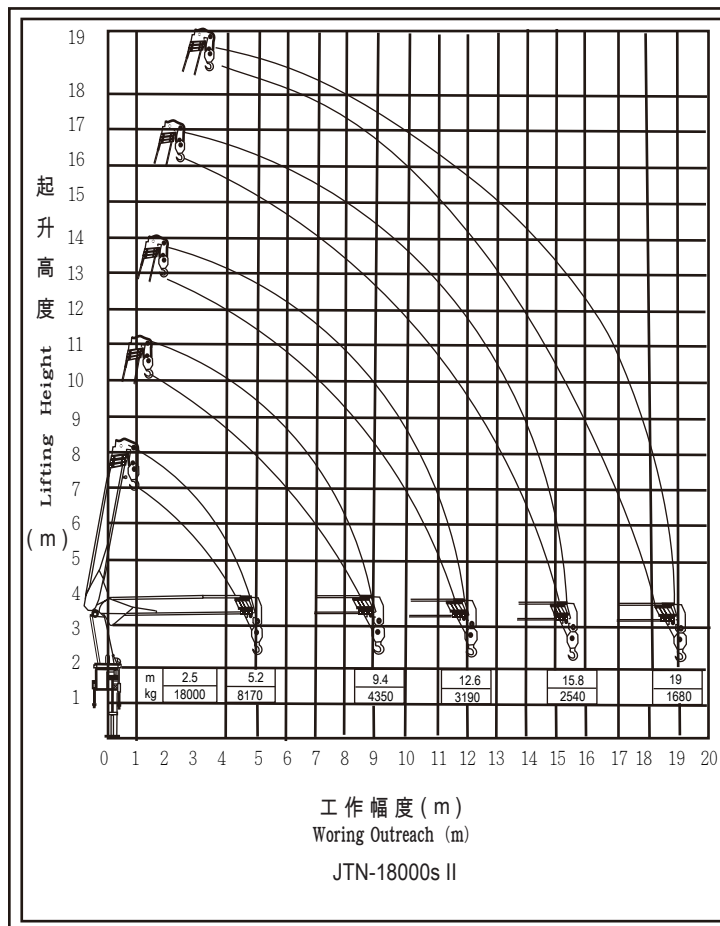



TWINS®

www.jrtwins.com

