




起重直臂技術圖冊

STRAIGHT ARM CRANE TECHNICAL ATLAS

JTN

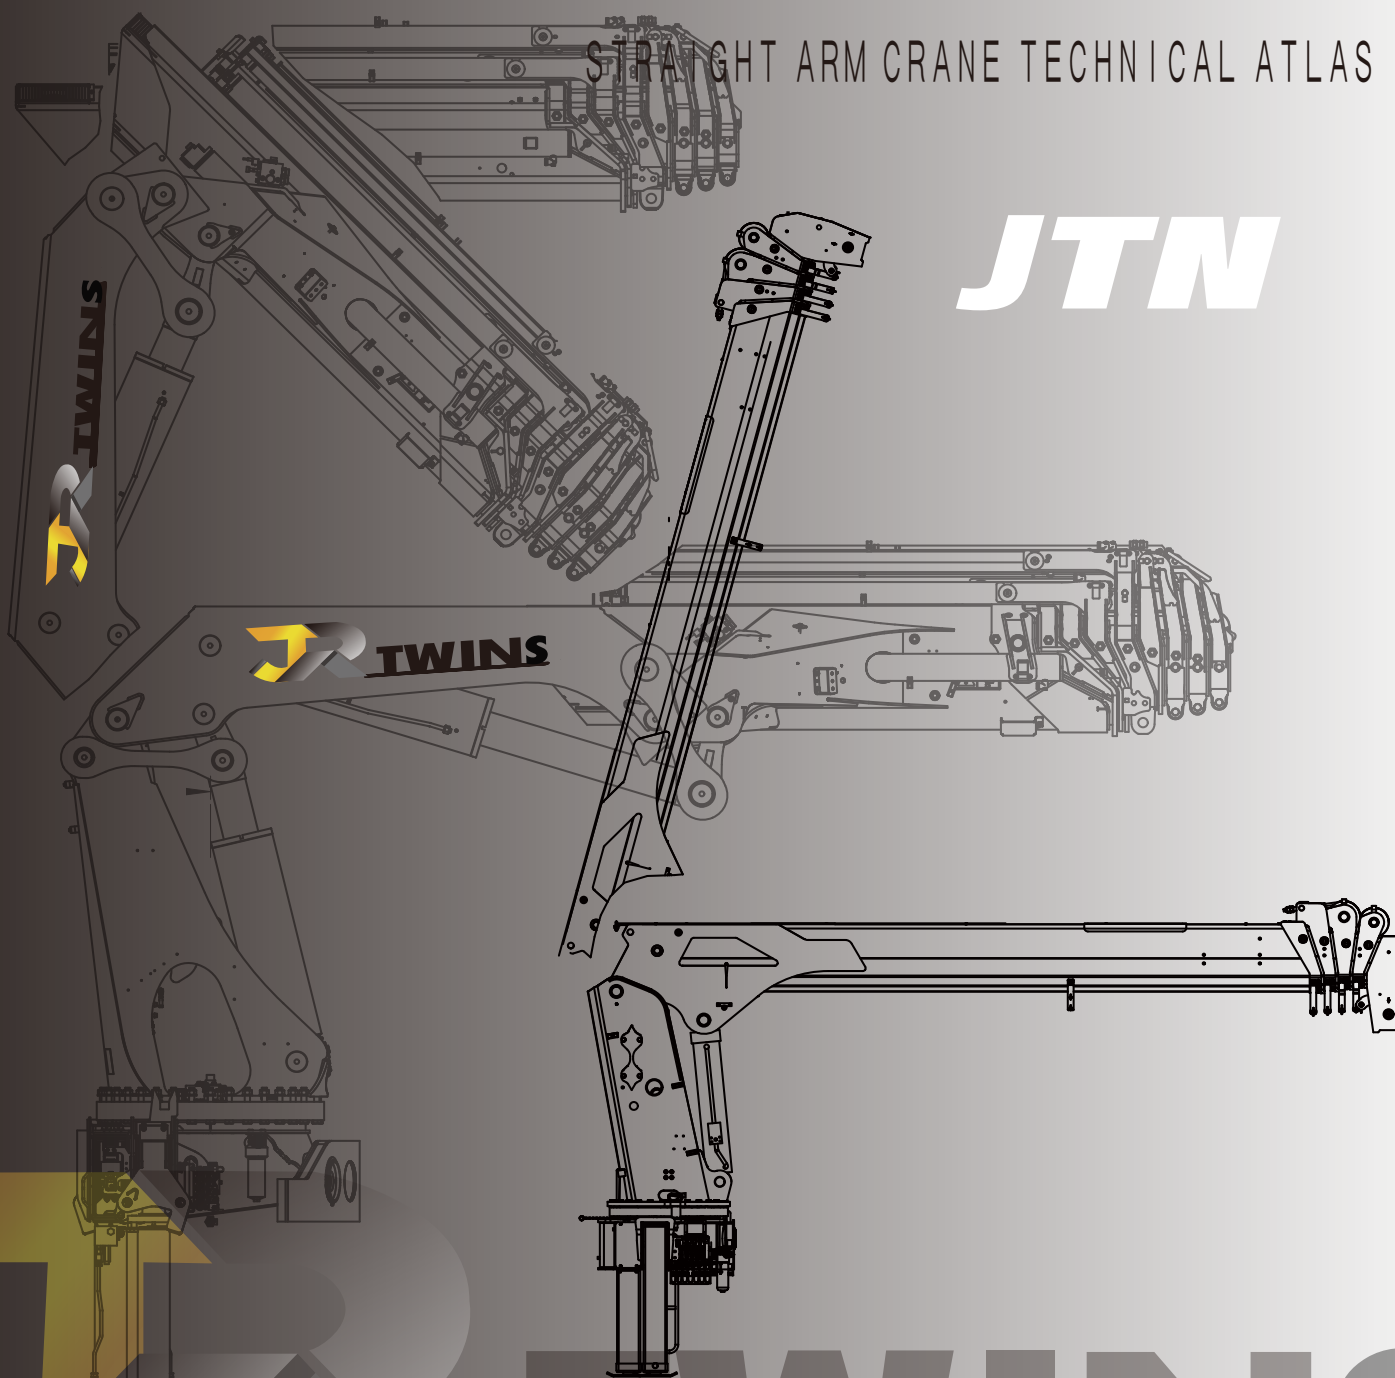

TWINS

Technical specification

Item	Unit	JTN-8000s I
額定吊載重量 Rated lifting weight	Kg	8000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	18.7
最大起升高度 Max lifting height	m	21
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	7.2
推薦系統流量 Recommend flow of the system	L/min	40
吊機自重 Deadweight of the crane	Kg	3800
系統額定壓力 Rated pressure of the system	Mpa	25
起重臂基本臂長 Basic boom length	m	5.6


JTN-8000s I 起重性能參數表

幅度 (M)	吊 臂 長 度				
	5.6	8.1	11.1	14.1	18.7
2.5	*8000				
3.0	*7000	*6500			
3.5	*5000	5500	5300		
4.0	4000	5000	4800	4000	
4.5	3000	4800	4300	3800	2900
5.0		4500	3700	3500	2800
6.0		3600	3200	3000	2500
7.0		2600	2600	2500	2200
8.0			2000	1800	1900
9.0			1600	1500	1600
10			1000	900	1300
12				800	1100
14				700	800
16					400
17.5					300
18.3					200

Recommend magnification

(*) 為6倍率

其餘為4倍率

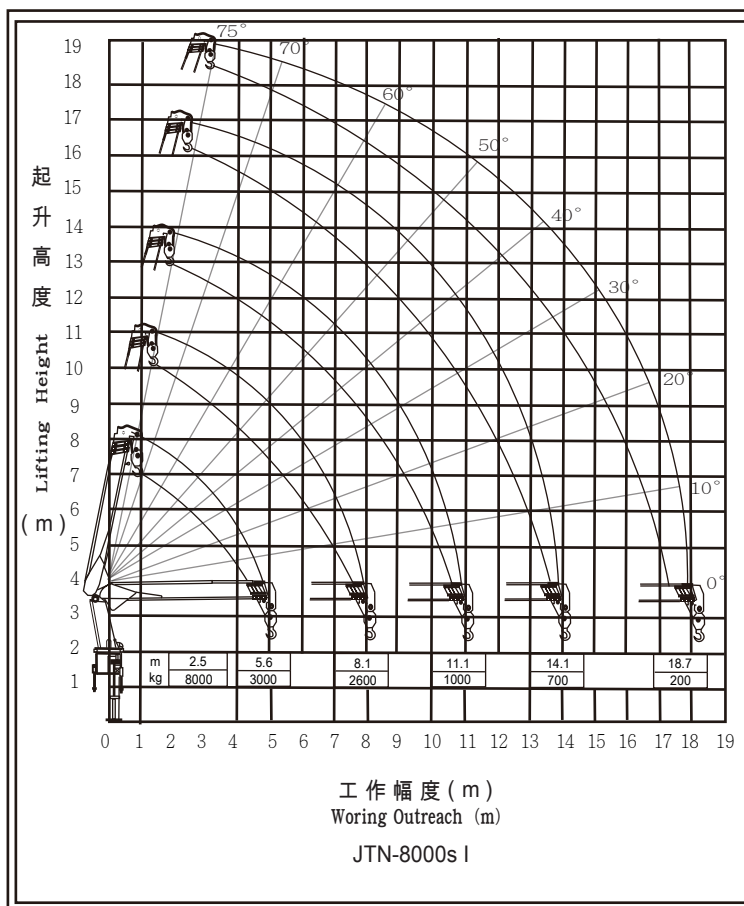


Technical specification

Item	Unit	JTN-8000s II
額定吊載重量 Rated lifting weight	Kg	8000
起重臂節數 Number of the Boom		6
起重臂全伸臂長 Length of fully extended boom	m	19.78
最大起升高度 Max lifting height	m	21
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	6
推薦系統流量 Recommend flow of the system	L/min	96
吊機自重 Deadweight of the crane	Kg	4400
系統額定壓力 Rated pressure of the system	Mpa	22
起重臂基本臂長 Basic boom length	m	4.85

JTN-8000s II 起重性能參數表

幅度 (M)	吊 臂 長 度					
	4.85	7.85	10.84	13.82	16.8	19.78
2.5	*8000	*7000	6000			
3.0	*7000	6000	4500	4000		
3.5	4800	5000	3850	3400	3100	
4.0	4300	4100	3370	3000	2600	2300
4.5	3800	3600	3000	2650	2300	2000
5.0	(4.6) 3200	3000	2700	2400	2100	1800
5.5		2700	2350	2100	1900	1650
6.0		2500	2150	2000	1750	1500
7.0		2100	1850	1700	1500	1300
8.0		(7.6) 1700	1600	1500	1300	1150
9.0			1400	1300	1150	1000
10			(10.6) 1100	1200	1050	900
11				1050	900	810
12				1000	820	750
13				900	750	700
14				(13.55) 700	650	600
15					600	550
16					(18.5) 550	520
17						490
18						450
19						420
19.5						300

Recommend magnification (*) 為6倍率 其餘為4倍率

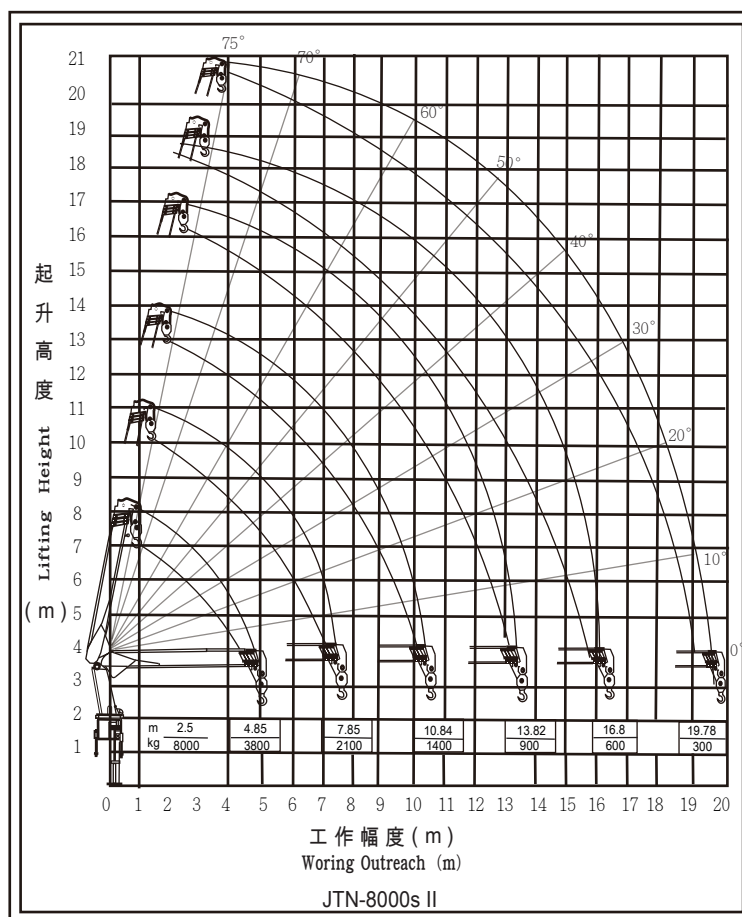


Technical specification

Item	Unit	JTN-10000s I
額定吊載重量 Rated lifting weight	Kg	10000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	17.5
最大起升高度 Max lifting height	m	19
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	6
推薦系統流量 Recommend flow of the system	L/min	50
吊機自重 Deadweight of the crane	Kg	5200
系統額定壓力 Rated pressure of the system	Mpa	25
起重臂基本臂長 Basic boom length	m	5.3

JTN-10000s I 起重性能參數表

幅度 (M)	吊臂長度				
	5.3	8.5	11.7	14.9	17.5
2.5	9800	5900			
3.0	7800	5500	5000		
3.5	6500	5000	4600	3800	
4.0	5600	4400	4200	3540	
4.5	4800	4000	3600	3300	3110
5.0		3600	3300	2900	2820
5.5		3160	2820	2660	2580
6.0		2940	2610	2450	2380
6.5		2800	2430	2280	2200
7.0		2600	2270	2130	2050
7.5		2400	2130	1990	1920
8.0		2200	2010	1870	1800
8.5			1890	1770	1700
9.0			1790	1670	1610
9.5			1690	1580	1520
10			1590	1500	1440
10.5			1480	1430	1370
11			1370	1360	1310
11.5				1290	1250
12				1230	1190
12.5				1170	1140
13				1110	1090
13.5				1060	1050
14				1010	1000
14.5				970	960
15					920
15.5					880
16					830
16.5					790
17					730
17.2					700
Recommend magnification	6	4	4	4	4

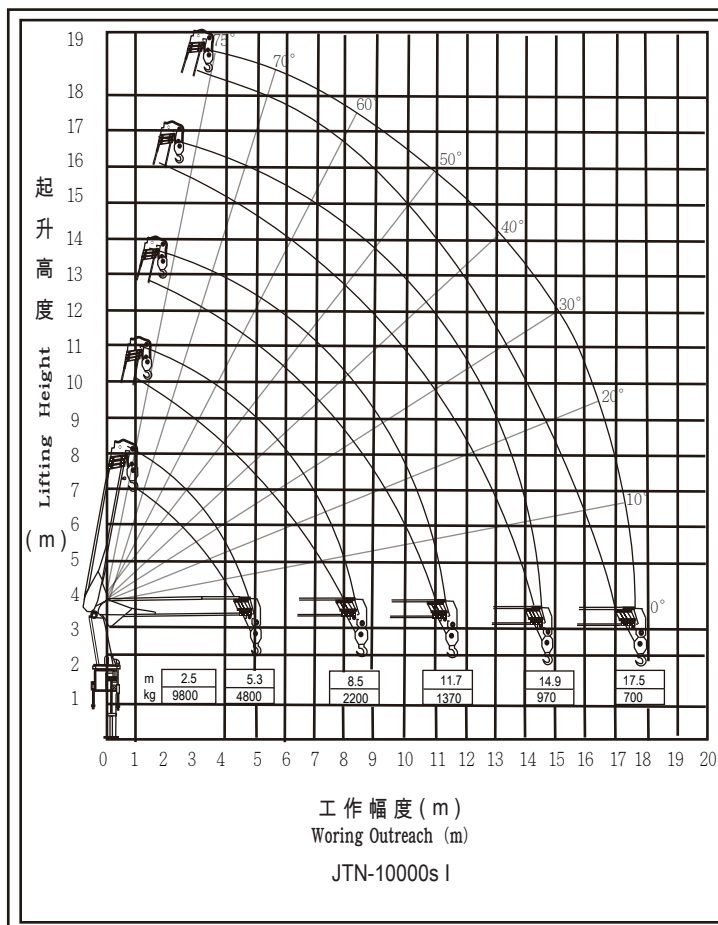


Technical specification

Item		Unit	JTN-10000s III
額定吊載重量	Rated lifting weight	Kg	10000
起重臂節數	Number of the Boom		6
起重臂全伸臂長	Length of fully extended boom	m	20.31
最大起升高度	Max lifting height	m	20.5
最大支腿跨距 (全伸)	Outrigger span (fully extended)	m	78.15
推薦系統流量	Recommend flow of the system	L/min	50
吊機自重	Deadweight of the crane	Kg	5200
系統額定壓力	Rated pressure of the system	Mpa	25
起重臂基本臂長	Basic boom length	m	5.48

JTN-10000s III 起重性能參數表

幅度 (M)	吊 臂 長 度					
	5.48	8.47	11.46	14.41	17.36	20.31
2.6	10000	7500				
3.0	7500	6800	5800			
4.0	5500	5000	4500	3800		
5.0	4200	4000	3800	3400	3200	
6.0	4000/5.21	3500	3300	3000	2800	2100
7.0		2800	2600	2300	2100	1800
8.0		2400	2200	2000	1800	1700
9.0			2000	1900	1700	1600
10			1700	1600	1500	1400
11			1500	1400	1300	1200
12				1300	1200	1100
13				1200	1100	1000
14				1100	1000	900
15					900	800
16					800	750
17						700
18						650
19						600
20						550
Recommend magnification	6	6	4	4	4	4

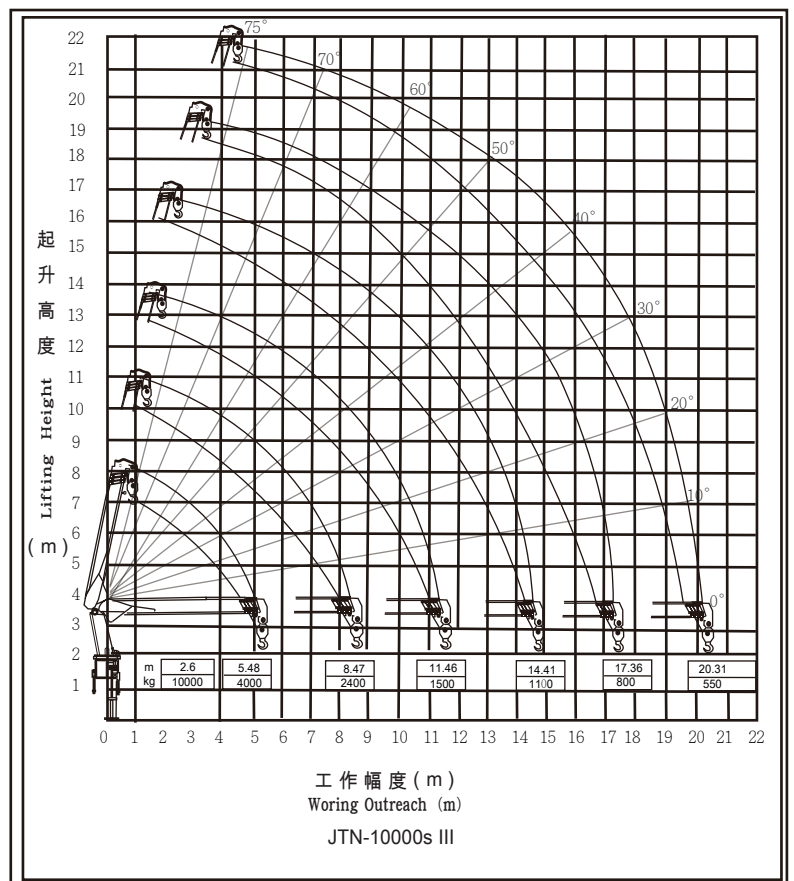


Technical specification

Item		Unit	JTN-12000s I
額定吊載重量	Rated lifting weight	Kg	12000
起重臂節數	Number of the Boom		5
起重臂全伸臂長	Length of fully extended boom	m	17.5
最大起升高度	Max lifting height	m	19
最大支腿跨距 (全伸)	Outrigger span (fully extended)	m	6
推薦系統流量	Recommend flow of the system	L/min	50
吊機自重	Deadweight of the crane	Kg	5500
系統額定壓力	Rated pressure of the system	Mpa	25
起重臂基本臂長	Basic boom length	m	5.3

JTN-12000s I 起重性能參數表

幅度 (M)	吊 臂 長 度				
	5.2	7.6	10.6	13.6	17.5
2.5	*11800				
3.0	*9800	*8800			
3.5	*8800	7100	6800		
4.0	7800	6800	6200	5800	
4.5	6600	6200	5800	5200	4200
5.0		5400	5000	4800	3500
6.0		5000	4200	3800	3000
7.0		4000	3300	3000	2700
8.0		3100	2800	2800	2400
9.0			2600	2600	2000
10			2000	1800	1600
12				1500	1300
14				1100	1100
16					900
17.2					700

Recommend magnification (*) 為6倍率 其餘為4倍率

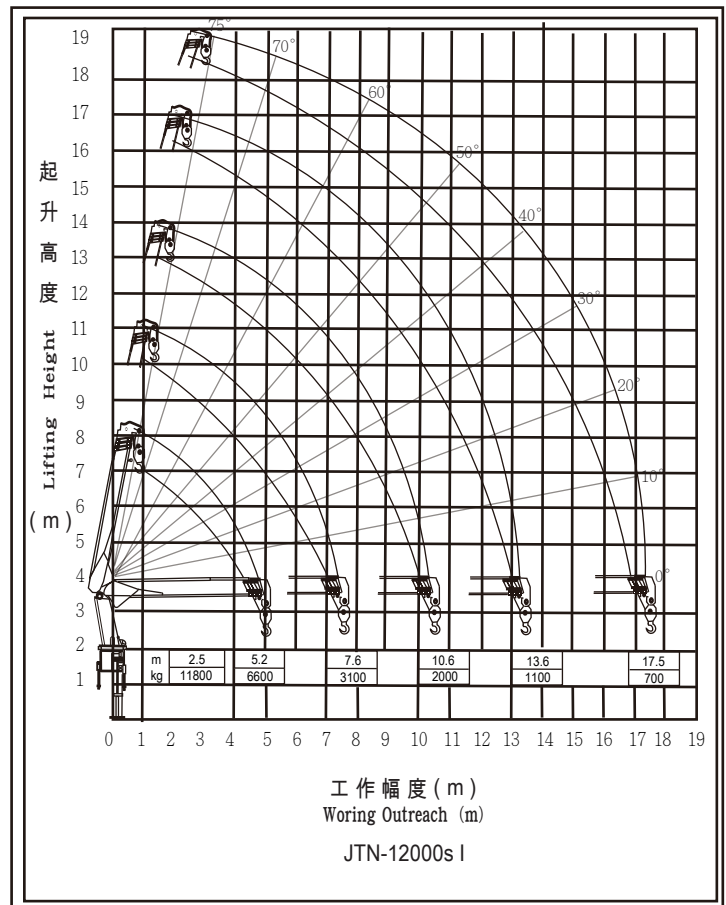

Technical specification


Item		Unit	JTN-12000s II
額定吊載重量	Rated lifting weight	Kg	12000
起重臂節數	Number of the Boom		5
起重臂全伸臂長	Length of fully extended boom	m	18.6
最大起升高度	Max lifting height	m	21
最大支腿跨距 (全伸)	Outrigger span (fully extended)	m	6
推薦系統流量	Recommend flow of the system	L/min	50
吊機自重	Deadweight of the crane	Kg	4500
系統額定壓力	Rated pressure of the system	Mpa	25
起重臂基本臂長	Basic boom length	m	5.6

JTN-12000s II 起重性能參數表

幅度 (M)	吊 臂 長 度				
	5.5	7.6	10.6	13.6	18.6
2.5	*12000				
3.0	*10000	*9000			
3.5	*9000	7300	7000		
4.0	8000	7000	6400	6000	
4.5	6800	6400	6000	5400	4400
5.0		5600	5200	5000	3700
6.0		5200	4400	4000	3200
7.0		4000	3500	3200	2900
8.0		3300	3000	3000	2600
9.0			2800	2800	2200
10			2200	2000	1800
12				1700	1500
14				1300	1300
16					1100
17.5					900
18.3					700

Recommend magnification

(*) 為6倍率 其餘為4倍率

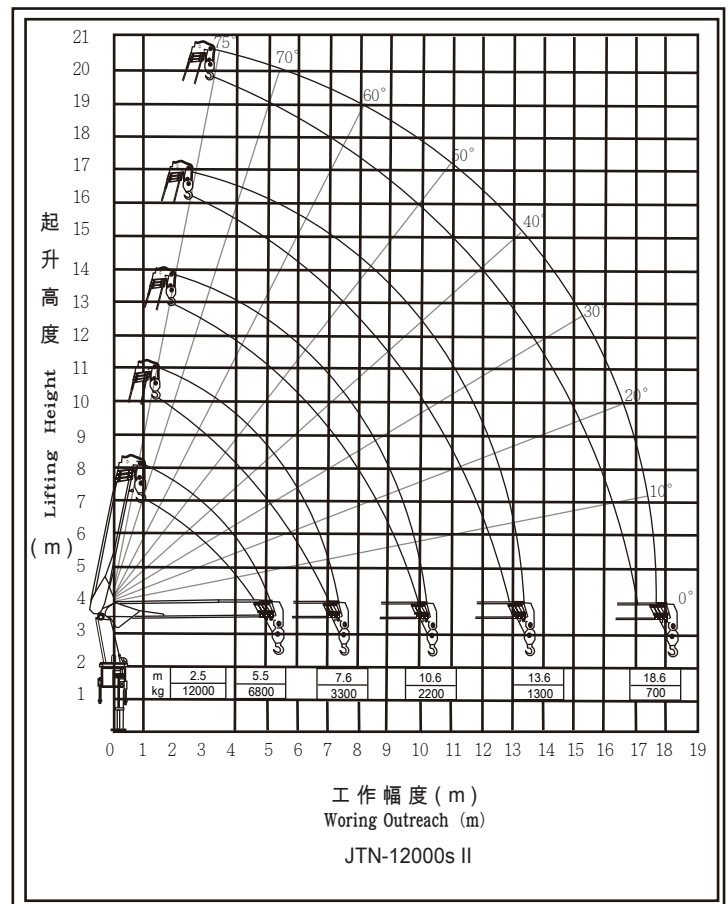


Technical specification

Item	Unit	JTN-12000s III
額定吊載重量 Rated lifting weight	Kg	12000
起重臂節數 Number of the Boom		6
起重臂全伸臂長 Length of fully extended boom	m	20.31
最大起升高度 Max lifting height	m	20.5
最大支腿跨距 (全伸) Outrigger span (fully extended)	m	7.815
推薦系統流量 Recommend flow of the system	L/min	50
吊機自重 Deadweight of the crane	Kg	5800
系統額定壓力 Rated pressure of the system	Mpa	25
起重臂基本臂長 Basic boom length	m	5.48

JTN-12000s III 起重性能參數表

幅度 (M)	吊 臂 長 度					
	5.48	8.47	11.46	14.41	17.36	20.31
2.6	12000	7900				
3.0	8000	7200	6100			
4.0	6000	5400	4800			
5.0	4700	4400	4100	3600	3400	
6.0		3900	3600	3200	3000	2300
7.0		3200	2900	2500	2300	2000
8.0		2800	2500	2200	2000	1900
9.0			2300	2100	1900	1800
10			1900	1800	1700	1600
11			1700	1600	1500	1400
12				1500	1400	1300
13				1400	1300	1200
14				1200	1200	1100
15					1000	1000
16					900	950
17						900
18						850
19						800
20						700
Recommend magnification	6	6	4	4	4	4

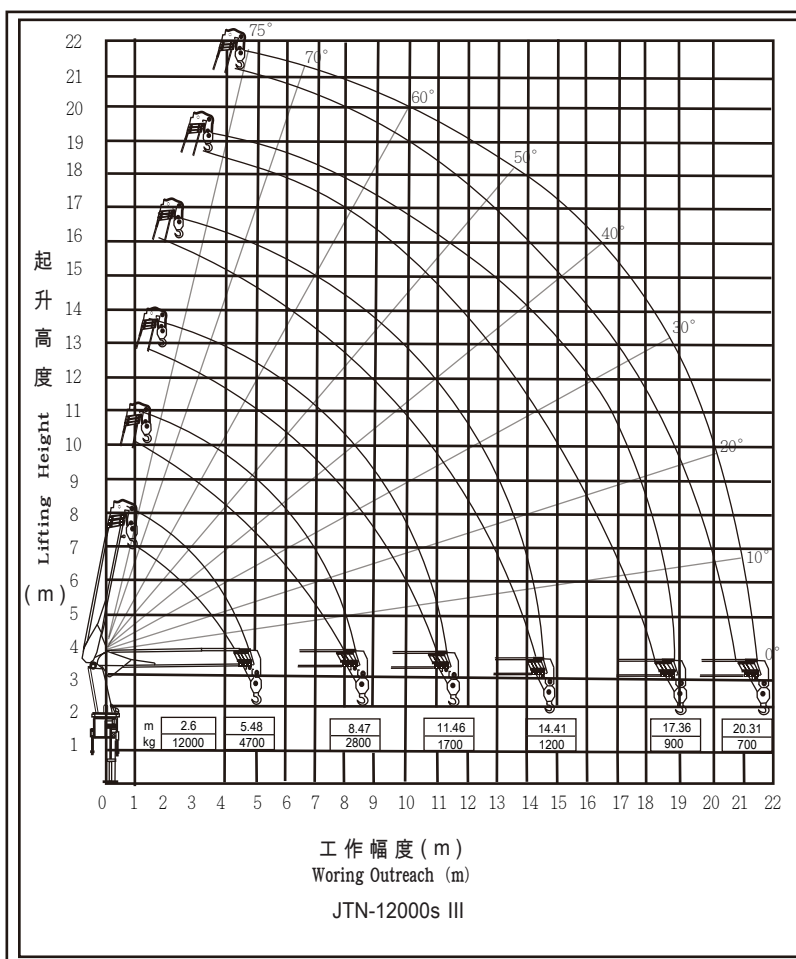


Technical specification

Item	Unit	JTN-14000s
額定吊載重量 Rated lifting weight	Kg	14000
起重臂節數 Number of the Boom		5/(6節需訂製)
起重臂全伸臂長 Length of fully extended boom	m	19.75
最大起升高度 Max lifting height	m	21.6
最大支腿跨距 (全伸) Outrigger span (fully extended)	m	7.2
推薦系統流量 Recommend flow of the system	L/min	63
吊機自重 Deadweight of the crane	Kg	5950
系統額定壓力 Rated pressure of the system	Mpa	25
起重臂基本臂長 Basic boom length	m	5.9 (臂短需訂製)

JTN-14000s 起重性能參數表

幅度 (M)	吊臂長度				
	5.85	9.4	12.85	16.3	19.75
2.0	15000				
2.5	14000	12190			
3.0	12000	10700			
3.5	10700	9480	8320		
4.0	9160	8320	7700		
4.5	7900	7490	6860	5810	
5.0	7280	6760	6240	5200	
5.5		6030	5510	4900	4590
6.0		5410	4990	4490	4280
6.5		4990	4680	4080	3770
7.0		4680	4370	3770	3470
7.5		4320	3820	3060	3160
8.0		4120	3630	2790	2860
8.5		3720	3450	2760	2650
9.0		3550	3200	2550	2450
9.5			3020	2470	2400
10.0			2840	2390	2350
10.5			2660	2290	2240
11.0			2500	2230	2140
11.5			2350	2120	2040
12.0			2160	2010	1890
12.5			2030	1990	1700
13.0				1910	1650
13.5				1840	1630
14.0				1690	1510
14.5				1570	1470
15.0				1520	1420
15.5				1460	1370
16.0					1300
16.5					1200
17.0					1100
17.5					1000
18.0					950
18.5					900
19.0					850
19.4					820
Recommend magnification	6	4	4	4	4

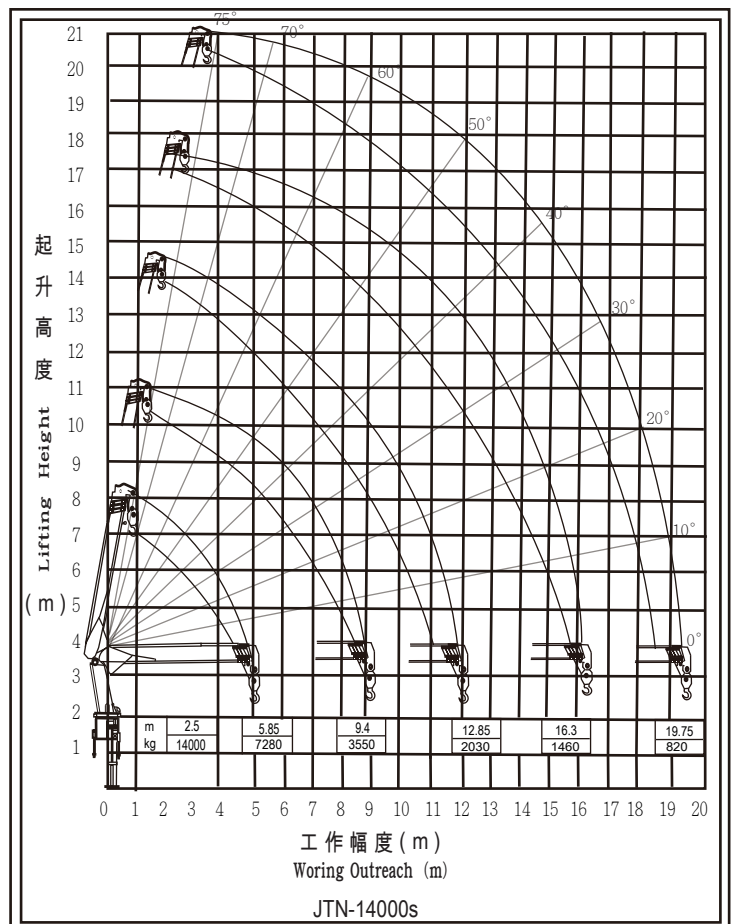


Technical specification

Item	Unit	JTN-16000s
額定吊載重量 Rated lifting weight	Kg	16000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	21
最大起升高度 Max lifting height	m	22
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	7.2
推薦系統流量 Recommend flow of the system	L/min	100
吊機自重 Deadweight of the crane	Kg	6500
系統額定壓力 Rated pressure of the system	Mpa	25
起重臂基本臂長 Basic boom length	m	6.1

JTN-16000s 起重性能參數表

幅度 (M)	6.1	9.6	13	16.2	21
2.5	*16000				
3.0	*13300	*13000			
3.5	11400	11000	10400		
4.0	10000	9600	9000	8600	
4.5	8800	8400	7800	7400	7000
5.0	8000	7600	7000	6600	6200
6.0	6700	6300	6100	5300	4900
7.0		5300	4700	4300	3900
8.0		4600	4000	3600	3200
9.0		4100	3500	3100	2900
11			2600	2200	1800
13			2080	1680	1380
15				1300	1260
17					1160
19.8					1000
20.5					900
Recommend magnification	(*) 為6倍率 其餘為4倍率				

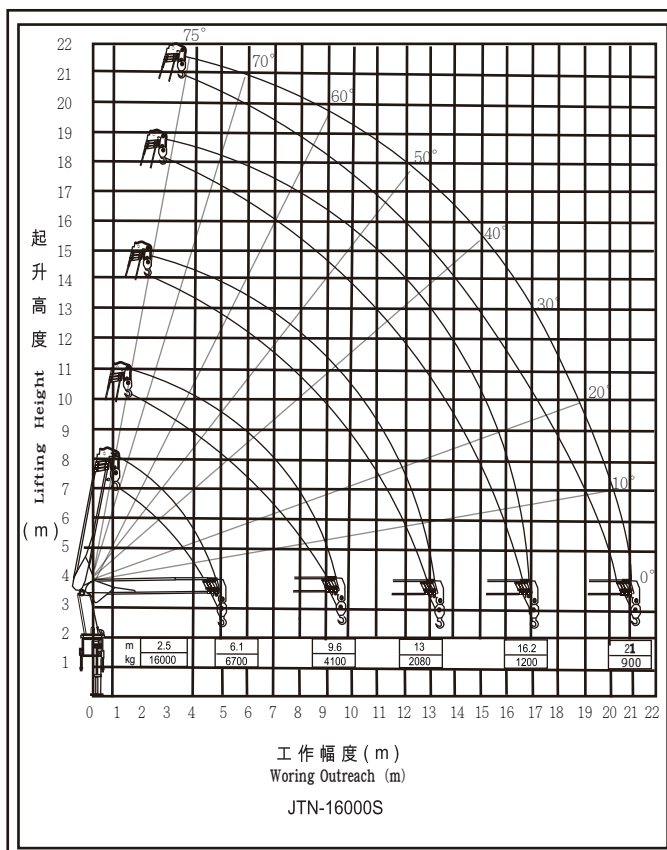


Technical specification

Item	Unit	JTN-18000s
額定吊載重量 Rated lifting weight	Kg	18000
起重臂節數 Number of the Boom		5
起重臂全伸臂長 Length of fully extended boom	m	21
最大起升高度 Max lifting height	m	22
最大支腿跨距 (全伸) Outtrigger span (fully extended)	m	8.2
推薦系統流量 Recommend flow of the system	L/min	80
吊機自重 Deadweight of the crane	Kg	6500
系統額定壓力 Rated pressure of the system	Mpa	32
起重臂基本臂長 Basic boom length	m	6

JTN-18000s 起重性能參數表

幅度 (M)	吊臂長度				
	6	9.5	13	16.5	21
2.5	18000	11000			
3.0	16000	10500	6800		
3.5	14000	10200	6600		
4.0	12500	9300	6200	5200	
4.5	11000	8200	6000	4800	
5.0	9600	7800	5700	4600	3300
5.5	8900	7200	5500	4400	3200
6.0		6800	5350	4300	3150
7.0		5900	5100	4000	3050
8.0		5300	4650	3800	2950
9.0		4250	4200	3650	2850
10			3800	3400	2700
11			3450	3150	2580
12			3100	2870	2450
13				2620	2300
14				2400	2100
15				2140	1950
16				1900	1750
17					1550
18					1360
19					1150
20.5					1000
Recommend magnification					
6 6 4 4 4					

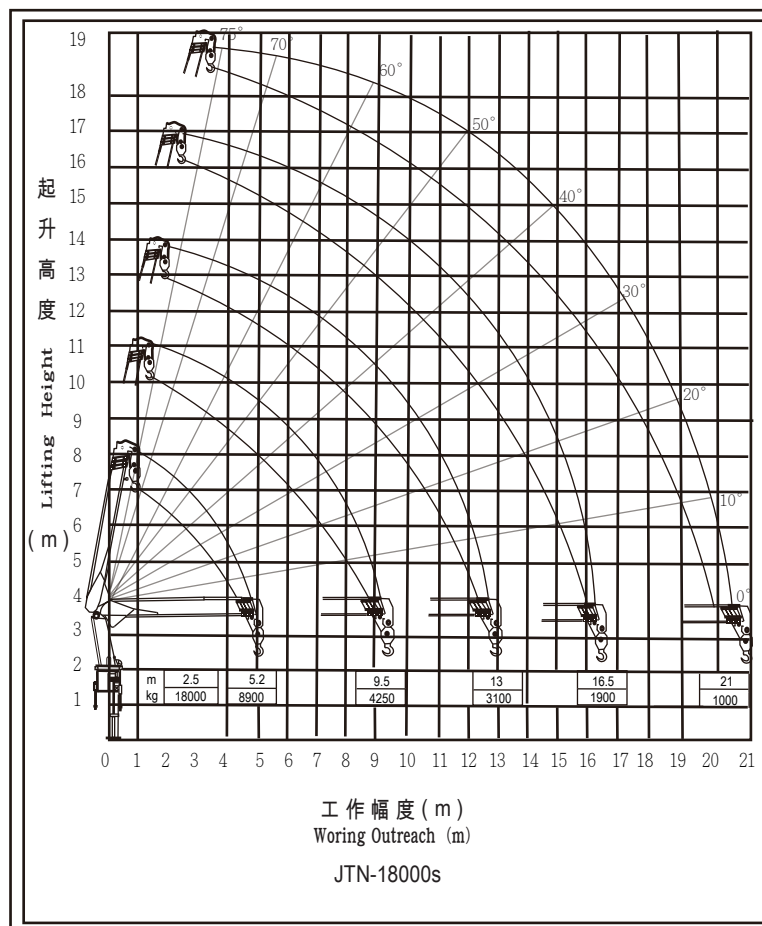



TWINS®

www.jrtwins.com

